

WORLDWIDE SAFE & VAULT UL-RATED TL-30 COMPOSITE HIGH SECURITY SAFE

SPECIFICATIONS

The **WORLDWIDE UL-TL-30** safes are made in the United States using the latest in modern technology with superior design and craftsmanship. This sophisticated, state-of-the-art, High Security Composite Burglary Safe provides you with six sides of burglary protection and has passed the stringent testing procedures set forth by Underwriters Laboratories.

The Body is a composite (12,000 PSI) single bell cast, one piece design with solid 3 1/2" thick walls. The high density insulating materials incorporated into the construction of the body and door ensure two hours of certified fire protection. The massive 6" thick door houses the impressive three-way active 1 1/2" diameter chrome plated bolts which engage both vertically and horizontally into the cast of the body. The bolts stay in the retracted position when the door is opened and automatically engage when the door is closed. The door has been equipped with self-lubricating ball bearing adjustable hinges that ensure a lifetime of use.

The locks used on the **WORLDWIDE SAFE** are of the highest quality and design available today. The combination lock is a UL-Group 2 three wheel, key changeable combination lock with spy-proof dial which is protected by a massive drill shattering hard plate. The safe also comes equipped with your choice of and auxiliary high security, seven-lever, independent key lock, or a second combination lock. Incorporated into the **WORLDWIDE UL-TL-30** is a high security tempered glass plate relocking mechanism, with remotely randomly placed relocking bolt and thermal cords to protect against torch attacks. Unlike most safes, the **WORLDWIDE UL-TL-30** offers three external spring loaded relockers to guard against punching attacks.

The **WORLDWIDE UL-TL-30** is finished in a highly advanced epoxy paint that has a built-in anti-corrosive primer. The standard color is a dusk gray with black and stainless steel accents. The safes include standard adjustable and removable shelves (see chart on reverse).

OPTIONS

- *UL-Group 2 Electronic Digital Combination Lock
- *Lockable Compartments
- *Custom Interiors
- *TSI Jewelry Carts

WORLDWIDE SAFES: Advanced security built to meet and exceed your requirements while providing you, the valued customer, with ultimate peace of mind.



WORLDWIDE SAFE AND VAULT

3660 NW 115th Avenue * Miami, Florida 33178

Local: 305-477-9266 * Fax: 305-477-9744

Internet: www.worldwidesafe.com

NATIONWIDE TOLL FREE: 800-932-2278

WORLDWIDE UL-RATED TL-30 COMPOSITE HIGH SECURITY SAFE



FIRE RESISTANT SAFE RATED 350° - 2 HOURS

This safe was tested by the manufacturer at an independent laboratory in a furnace at temperatures up to 1850° F, for a period of 2 hours. Interior Temperature did not exceed 350°.


MODEL	INSIDE DIMENSIONS			OUTSIDE DIMENSIONS			WEIGHT	SHELF	CUBIC CAP.
	HEIGHT	WIDTH	DEPTH	HEIGHT	WIDTH	DEPTH			
WW-1814	18"	14"	12"	25"	21"	21 ½"	710 LBS.	1	1.8
WW-2518	25"	18"	14"	32"	25 ½"	25 ½"	1125 LBS	1	4.20
WW-3518	35"	18"	21"	42"	25"	30 ½"	1779 LBS	2	7.70
WW-3524	35"	24"	20"	42"	31"	29 ½"	1970 LBS	3	9.70
WW-4524	45"	24"	20"	52"	31"	29 ½"	2100 LBS	3	12.9
WW-6020	60"	20"	21"	67"	27"	30 ½"	2768 LBS	4	14.6
WW-5524	55"	24"	20"	62"	31"	29 ½"	2787 LBS	4	15.3
WW-6528	65"	28"	21"	72"	35"	29 ½"	3453 LBS	5	21.1
WW-6032	60"	32"	21"	67"	39"	30 ½"	3558 LBS	5	23.3
WW-653622	65"	36"	22"	72"	43"	31 ½"	4140 LBS	5	29.8
WW-7236	72"	36"	23"	79"	43"	32 ½"	4200 LBS	5	34.5
WW-6536	65"	36"	26"	72"	43"	35 ½"	4424 LBS	5	35.2

ADD 2 1/2" FOR HANDLE AND LOCK PROTRUSION

OUR POLICY IS ONE OF CONSTANT IMPROVEMENT. WE THEREFORE RESERVE THE RIGHT TO INCORPORATE ANY CHANGES WITHOUT PRIOR NOTICE

DOOR SWING PROJECTIONS

MODEL	A	B	C
WW-1814	14"	39 ½"	36"
WW-2518	18"	47 ½"	44"
WW-3518	18"	52"	44"
WW-324	24"	57"	56"
WW-4524	24"	57"	56"
WW-6020	20"	54"	48"
WW-5524	24"	57"	56"
WW-6528	28"	61"	64"
WW-6032	32"	66"	72"
WW-653622	36"	71"	80 1/2"
WW-7236	36"	72 ½"	80 1/2"
WW-6536	36"	74"	80 1/2"

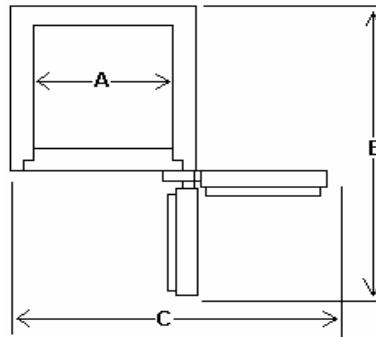

WORLDWIDE SAFE AND VAULT
NATIONWIDE TOLL FREE: 800-932-2278