

The SuperFortress TRTL30X6

High Security Burglary and Fire Resistive Safe



TRX6831X

Body

The safe has a total body thickness of 4 1/8". High strength alloys and our proprietary barrier material combine to provide multi-layer protection designed to withstand the most sophisticated attack by tools, torch or explosives.

Door

The door has a thickness of 8 1/4". The same high strength alloys and proprietary barrier material used to protect the body are repeated in the door.

Locks

U.L. listed manipulation resistant high strength Group 1 combination lock with spy proof dial are used on all TRTL30X6 safes. A separate high security auxiliary key lock is standard on all models.

Boltwork

Massive 1 1/2" diameter chromed high tensile steel bolts are driven both horizontally and vertically through reinforced bolt chambers by the safe's three-way boltwork mechanism. The hinge side of the door is protected by a row of dead bolts that fit into similar reinforced bolt chambers.

Glass Relockers

A large tempered glass plate is used to protect vital areas of the locking mechanism. If attacked, the glass will shatter and cause the relockers to activate thereby preventing the safe from being opened.

Interior

All models are supplied with adjustable shelves.



Worldwide Safe & Vault, Inc.

Nationwide Toll Free: 800-932-2278

www.worldwidesafe.com

info@worldwidesafe.com


The SuperFortress TRTL30X6 Protection and Craftsmanship Combined!

The SuperFortress TRTL30X6 is the newest safe in this class to pass the U.L. test. The safe utilizes the newest, most revolutionary technology to form the strongest safe to pass this most severe test. Massive copper plates incorporated into our patented composite material achieving over 40,000 pounds of compression strength, makes this one of the most formidable defensive barriers ever offered.

Options available

- U.L. listed electronic digital locks • Time locks • Inner Compartments / lockers

Independently tested by U.L. for your peace of mind.

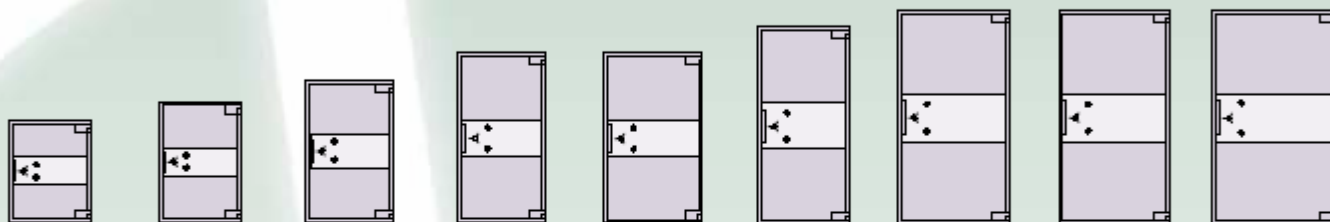

TRX2720 TRX3420 TRX4720 TRX5520 TRX5524 TRX6420 TRX6831 TRX6831X TRX6836

SPECIFICATIONS

model	interior dimensions (in)			exterior dimensions (in)			capacity	weight
	height	width	depth	height	width	depth	(ft ³)	(lbs.)
TRX2720	27	20	16	35.25	28.25	28.25	5.0	2,500
TRX3420	34	20	23	42.25	28.25	35.25	9.1	3,000
TRX4720	47	20	23	55.25	28.25	35.25	12.5	3,500
TRX5520	55	20	23	63.25	28.25	35.25	14.6	4,000
TRX5524	55	24	20	63.25	28.25	32.25	15.3	4,400
TRX6420	64	20	23	72.25	28.25	35.25	17.0	4,700
TRX6831	68	31	16.75	76.25	39.25	29	20.4	5,600
TRX6831X	68	31	19.75	76.25	39.25	32	24.1	5,800
TRX6836	68	36	26	76.25	44.25	38.25	36.8	6,750

Add 2 in. to depth for handle projection. All specifications are approximate and subject to change without notice.

Note: The best protection is a safe tailored to your needs and cash risk. Consultation with a security professional is advised.

door swing dimensions (in)

model	A	B
TRX2720	52.5	49
TRX3420	59.5	48.75
TRX4720	59.5	48.75
TRX5520	59.5	48.75
TRX5524	60.5	57
TRX6420	59.5	48.75
TRX6831	71	70
TRX6831X	71	73
TRX6836	81.25	78.25

Worldwide Safe & Vault, Inc.

3660 N.W. 115th Avenue
Miami, Florida 33178 USA

Nationwide Toll Free: 800-932-2278

Local: 305-477-9266

Fax: 305-477-9744

www.worldwidesafe.com

info@worldwidesafe.com