


# **WORLDWIDE U.L. RATED MODULAR VAULT SYSTEMS**

**Class M, 1, 2, 3**  
**(HIGH DENSITY & LIGHTWEIGHT VERSIONS)**

## **High Security**

When security of the highest level is required, Worldwide provides the answer.

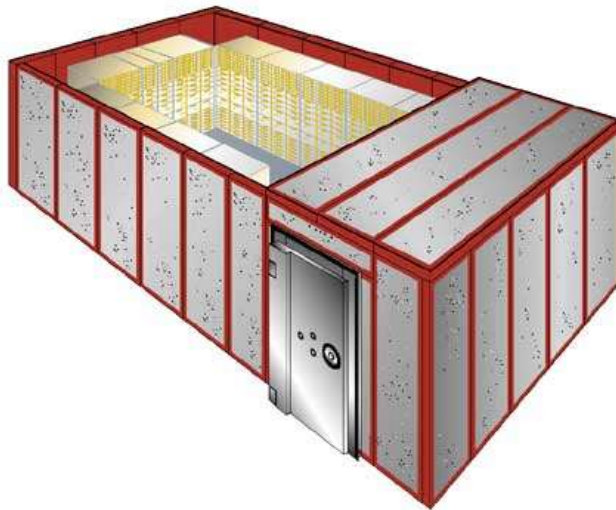

## **Solid Construction**

The panels are manufactured with a combination of concrete products and security fibers enclosed within a metal frame. The panels are designed to fit together on site to create the walls, ceiling and floor of the vault. Only electrostatic coated metals are used, and all welds are coated to ensure there is no material degradation. Worldwide's manufacturing methods meet the strict requirements of Underwriters Laboratories, Inc. – Standard U.L. 608.

## **Custom Design**

High Density & Lightweight Vault Panels are sized to meet the specific job requirement. The High Density Vault ceiling panels can span up to 13' and may be installed either across the width or depth of the vault. For spans that exceed 13', an I-Beam is required. The Lightweight Vault ceiling panels can span up to 16' and may be installed either across the width or depth of the vault. For spans that exceed 16', an I-Beam is required.

Class "M" Modular Vault Panel System meets U.S. Government's DEA (Drug-Enforcement Administration) standards and has been used on numerous GSA (General Services Administration) projects. All materials and workmanship are guaranteed to be of the highest quality and are listed by Underwriters Laboratories, Inc.

## **Turn-Key Approach**

Coordinated with your architects, designers and engineers throughout the fabrication process. Delivery and installation is available by our experienced teams to provide a total solution.

**WORLDWIDE SAFE & VAULT 800-932-2278**

## HIGH DENSITY MODULAR VAULT PANELS

<b>U.L. CLASS</b>	<b>M</b>	<b>1</b>	<b>2</b>	<b>3</b>
<b>THICKNESS</b>	<b>3"</b>	<b>5"</b>	<b>7"</b>	<b>11"</b>
<b>WEIGHT PER SQUARE FOOT OF SURFACE</b>	<b>40 LBS.</b>	<b>69 LBS.</b>	<b>95 LBS.</b>	<b>155 LBS.</b>



## LIGHTWEIGHT MODULAR VAULT PANELS

<b>U.L. CLASS</b>	<b>M</b>	<b>1</b>	<b>2</b>	<b>3</b>
<b>THICKNESS</b>	<b>3 1/2"</b>	<b>5 1/2"</b>	<b>10 1/2"</b>	<b>12"</b>
<b>WEIGHT PER SQUARE FOOT OF SURFACE</b>	<b>19 LBS.</b>	<b>25 LBS.</b>	<b>44 LBS.</b>	<b>75 LBS.</b>
<b>INSIDE SPAN WITHOUT ADDITIONAL SUPPORT*</b>	<b>16'</b>	<b>21'</b>	<b>29'</b>	<b>36'</b>

\*THE STANDARD LIMIT IS SET AT 16' FOR ALL CLASSES DUE TO ACCESS AND INSTALLATION CONSIDERATIONS

### **Worldwide Safe & Vault, Inc.**

3660 N.W. 115<sup>th</sup> Avenue, Miami, Florida 33178 USA

**Nationwide Toll Free: 800-932-2278**

Local: 305-477-9266 \* Fax: 305-477-9744

[www.worldwidesafe.com](http://www.worldwidesafe.com)

info@worldwidesafe.com