

WORLDWIDE UL-RATED TL-30x6 COMPOSITE HIGH SECURITY SAFE

SPECIFICATIONS

The **WORLDWIDE UL-TL-30x6** safes are made using the latest in modern technology with superior design and craftsmanship. This sophisticated, state-of-the-art, High Security Composite Burglary Safe provides you with six sides of burglary protection and has passed the stringent testing procedures set forth by Underwriters Laboratories.

The Body is a composite (12,000 PSI) single bell cast, one-piece design with solid 3 1/2" thick walls. The high density insulating materials incorporated into the construction of the body and door insure two hours of certified fire protection. The massive 6" thick door houses the impressive three-way active 1 1/2" diameter chrome plated bolts, which engage both vertically and horizontally into the cast of the body. The bolts stay in the retracted position when the door is opened and automatically engage when the door is closed. The door has been equipped with self-lubricating ball bearing adjustable hinges that ensure a lifetime of use.

The locks used on the **WORLDWIDE SAFE** are of the highest quality and design available today. The combination lock is a UL-Listed three wheel, key changeable combination lock with spy-proof dial, which is protected by a massive drill shattering hard plate. The safe also comes equipped with your choice of an auxiliary high security, seven-lever, independent key lock, or a second combination lock. Incorporated into the **WORLDWIDE UL-TL-30x6** is a high security tempered glass plate relocking mechanism, with remotely randomly placed relocking bolt and thermal cords to protect against torch attacks. Unlike most safes, the **WORLDWIDE UL-TL-30x6** offers three external spring loaded relockers to guard against punching attacks.

The **WORLDWIDE UL-TL-30x6** is finished in a highly advanced epoxy paint that has a built-in anti-corrosive primer. The standard color is dusk gray with black and stainless steel accents. The safes include standard adjustable and removable shelves (see chart on reverse).

OPTIONS

- *U.L. Listed Electronic Access Control Safe Locks
- *Lockable Internal Compartments
- *Custom Interiors
- *TSI Jewelry Carts

WORLDWIDE SAFES: Advanced security built to meet and exceed your requirements while providing you, the valued customer, with ultimate peace of mind.



NATIONWIDE TOLL FREE: 800-932-2278

WORLDWIDE UL-RATED TL-30x6 COMPOSITE HIGH SECURITY SAFE



FIRE RESISTANT SAFE RATED 350° - 2 HOURS

This safe was tested by the manufacturer at an independent laboratory in a furnace at temperatures up to 1850° F, for a period of 2 hours. Interior Temperature did not exceed 350°.


Model	Inside HxWxD	Outside HxWxD	Weight	Capacity	Shelves
WX-3620	36 x 20 x 20	44 x 28 x 31	1790 LBS	8.33 cu ft	2
WX-5524	55 x 24 x 20	63 x 32 x 31	3310 LBS	15.3 cu ft	4
WX-6528	65 x 28 x 18	73 x 36 x 31	3920 LBS	19.0 cu ft	5
WX-6836	68 x 36 x 26	76 x 44 x 37	5630 LBS	36.8 cu ft	5

ADD 2" FOR HANDLE AND LOCK PROTRUSION

OUR POLICY IS ONE OF CONSTANT IMPROVEMENT. WE THEREFORE RESERVE THE RIGHT TO INCORPORATE ANY CHANGES WITHOUT PRIOR NOTICE

DOOR SWING PROJECTIONS

MODEL	A	B	C
WX-3620	20"	56"	51"
WX-5524	24"	60"	61"
WX-6528	28"	62"	65"
WX-6836	36"	72"	80"

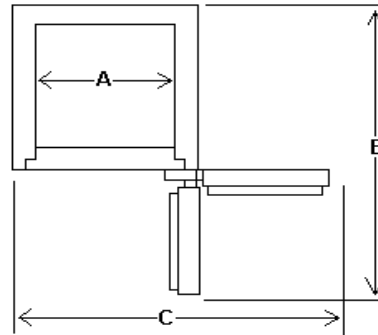

Worldwide Safe & Vault, Inc.

3660 N.W. 115th Avenue, Miami, Florida 33178 USA

Nationwide Toll Free: 800-932-2278

Local: 305-477-9266 * Fax: 305-477-9744

www.worldwidesafe.com

info@worldwidesafe.com