

WORLDWIDE SUPER FORTRESS UL-RATED TRTL-30X6 HIGH SECURITY SAFE

SPECIFICATIONS

Body

The safe has a total body thickness of 4". High strength alloys and our proprietary barrier material combine to provide multi-layer protection designed to withstand the most sophisticated attack by tools, torch or explosives.

Door

The door has a thickness of 8". The same high strength alloys and proprietary barrier material used to protect the body are repeated in the door.

Locks

U.L. listed manipulation resistant high strength Group 1 combination locks with spy proof dial are used on all TRTL30X6 safes.

Boltwork

Massive 1 1/2" diameter chromed high tensile steel bolts are driven both vertically through reinforced bolt chambers. The hinge side of the door is protected by a row of dead bolts that fit into similar reinforced bolt chambers. The opening side is protected by a full height locking bar to help prevent a pry/punch attack.

Glass Relockers

A large tempered glass plate is used to protect vital areas of the locking mechanism. If attacked, the glass will shatter and cause the relockers to activate thereby preventing the safe from being opened.

The **WORLDWIDE UL-TRTL-30X6** is finished in a highly advanced epoxy paint that has a built-in anti-corrosive primer. The standard color is a dusk gray with black and stainless steel accents. The safes include standard adjustable and removable shelves (see chart on reverse).

OPTIONS

- *UL-Type 1 Electronic Access Control Safe Locks
- *Lockable Compartments
- *Custom Interiors
- *TSI Jewelry Carts

WORLDWIDE SAFES: Advanced security built to meet and exceed your requirements while providing you, the valued customer, with ultimate peace of mind.

WORLDWIDE SAFE AND VAULT

3660 NW 115th Avenue * Miami, Florida 33178

Local: 305-477-9266 * Fax: 305-477-9744

Internet: www.worldwidesafe.com

NATIONWIDE TOLL FREE: 800-932-2278



WORLDWIDE UL-RATED TRTL-30X6 HIGH SECURITY SAFE



FIRE RESISTANT SAFE RATED 350° - 2 HOURS


This safe was tested by the manufacturer at an independent laboratory in a furnace at temperatures up to 1850° F, for a period of 2 hours. Interior Temperature did not exceed 350°.

MODEL	INSIDE DIMENSIONS			OUTSIDE DIMENSIONS			WEIGHT	SHELF	CUBIC CAP.
	HEIGHT	WIDTH	DEPTH	HEIGHT	WIDTH	DEPTH			
TRX-272016	27	20	20	35	29 ¼	32 ½	1975 LBS	1	5.9
TRX-342020	34	20	20	42	29 ¼	32 ½	2240 LBS	2	7.9
TRX-472020	47	20	20	55	29 ¼	32 ½	2760 LBS	3	10.5
TRX-552020	55	20	20	63	29 ¼	32 ½	3060 LBS	3	12.4
TRX-552420	55	24	20	63	33 ¼	32 ½	3450 LBS	3	15.3
TRX-642020	64	20	20	72	29 ¼	32 ½	3510 LBS	4	14.5
TRX-683120	68	31	20	76	40 ¼	32 ½	4610 LBS	4	23.9
TRX-683620	68	36	20	76	45 ¼	32 ½	5160 LBS	4	27.7
TRX-683626	68	36	26	76	45 ¼	38 ½	5575 LBS	4	36.8
TRX-723626	72	36	26	80	45 ¼	38 ½	5890 LBS	4	38.2

PLEASE ALL 2 3/4" TO THE DEPTH FOR THE PROTRUSION OF THE HANDLE/HINGES
 OUR POLICY IS ONE OF CONSTANT IMPROVEMENT. WE THEREFORE RESERVE THE RIGHT TO INCORPORATE ANY CHANGES WITHOUT PRIOR NOTICE

DOOR SWING PROJECTIONS

MODEL	A	B	C
TRX-272020	20	57 5/8	52 ¾
TRX-342020	20	57 5/8	52 ¾
TRX-472020	20	57 5/8	52 ¾
TRX-552020	20	57 5/8	52 ¾
TRX-552420	24	61 5/8	60 ¾
TRX-642020	20	57 5/8	52 ¾
TRX-6831X	31	68 5/8	74 ¾
TRX-683620	36	73 5/8	84 ¾
TRX-683626	36	79 5/8	84 ¾
TRX-723626	36	79 5/8	84 ¾

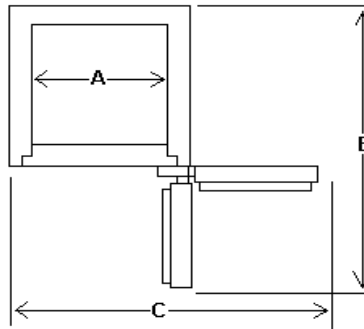

WORLDWIDE SAFE AND VAULT

3660 NW 115th Avenue * Miami, Florida 33178

Local: 305-477-9266 * Fax: 305-477-9744

Internet: www.worldwidesafe.com

NATIONWIDE TOLL FREE: 800-932-2278